

GS EVO 30S4 1500X525

Professional hand pallet truck (3.000 kg)



REINFORCED STRUCTURE

Steel bars welded under the forks, solid tie-rod as well as a base with thick metal sheet allow the GS 30 to easily handle the heaviest loads.



VARNISHING

Following an appropriate conditioning operation the frame is varnished with polyester powder at a temperature of 250° to guarantee maximum resistance to wear and atmospheric agents.



STANDARD CONFIGURATION

- Nylon - Poly 45 steering wheels
- Poly rollers



- **Entry/exit rollers.** Supplementary rollers to allow easier entrance and quicker exit from a closed pallet, reducing the impact on the main rollers and guaranteeing a longer life



- **3D Superior Ergonomic shape tiller.** This tiller has a special 3D design, with enhanced ergonomics. Compared to a conventional tiller, this shape allows the operator to have a good position when pushing the loads with maximum efficiency without fatigue. This thanks to two large grasping side areas specifically designed to have a correct position during operation of the truck



OPTIONAL CONFIGURATION

- **All types of steering wheels and rollers** (Rubber, Aluminum/Poly, Nylon)
- **Quicklift.** The perfect tool for quick lifting your loads. Saving time and improving efficiency with the specifically designed hydraulic pump. Just two pumps will lift loads under 120kg off the ground or three pumps for loads above 120kg. Compared to 5 pumps with a standard hand pallet truck
- **Covered tiller.** Soft rubber covering grants operator comfort and helps to reduce vibration, enabling a more comfortable and secure grip.
- **Manual control brake.** Made by drum brake on each steering wheel, controlled by dedicated lever on the tiller, it is available with rubber and poly steering wheels. It ensures that the machine doesn't move during parking.



EASY TO MOUNT

Tiller easy to assemble with a fast mounting system. Robust tiller connection with two full welded joints that assure superior sturdiness in the toughest application.



Descrição

1.1 Fabricante			PR INDUSTRIAL
1.3 Acionamento			Manual
1.4 Tipo de Operador			Pedestre
1.5 Capacidade de carga	Q	Kg	3000
1.6 Centro de distância de carga	c	mm	750
1.8 Carga do eixo ao final dos garfos	x	mm	1282
1.9 Base de roda	y	mm	1542

Peso

2.1 Peso de Serviço		Kg	117
2.2 Carga do Eixo - Frente Próxima		Kg	2015
2.2 Carga do eixo - frente carregada		Kg	1102
2.3 Carga do eixo - frente vazia		Kg	50
2.3 Carga do eixo - frente vazia		Kg	67

Estrutura/Rodas


3.1 Kola sterujące			POLY.I./ NYLON
3.1 Rodas: Rolos de carga			POLY
3.2 Tamanho do Pneu: Volantes - Diâmetro		mm	200
3.2 Tamanho do pneu: Volantes - Largura		mm	45
3.3 Tamanho do pneu: Rolos de carga - Diâmetro		mm	82
3.3 Tamanho do Pneu: Rolos de Carga - Largura		mm	60
3.5 Dimensão dos pneus: rodas traseiras - Qtd. (X=livre)		nr	4
3.5 Dimensão dos pneus: rodas dianteiras - Qtd. (X=livre)		nr	2
3.6 Piso da Frente		b10 mm	155
3.7 Traseira do Piso		b11 mm	375

Dimensões

4.4 Altura da Elevação		h3 mm	115
4.9 Altura Maxima em Posição de Movimento		h14 mm	1185
4.9 Height of tiller in drive position min		h14 mm	710
4.15 Altura, Baixo		h13 mm	85
4.19 Comprimento Total		l1 mm	1900
4.20 Comprimento dos Garfos		l2 mm	400
4.21 Largura Total		b1 mm	525
4.22 Garfos - Espessuras		s mm	50
4.22 Garfos - Largura		e mm	150
4.22 Garfos - Comprimentos		l mm	1500
4.25 Distância Entre Garfos		b5 mm	525
4.32 Ao Solo, Centro de Distância Entre os Eixos		m2 mm	35
4.34 Largura do Corredor		Ast mm	2373
4.35 Raio do Ângulo		Wa mm	1717

Desempenho

5.2 Velocidade de Elevação Carregado		strokes	12
5.2 Velocidade de Elevação Descarregado		strokes	12
5.3 Velocidade com Carga		m/s	0.06

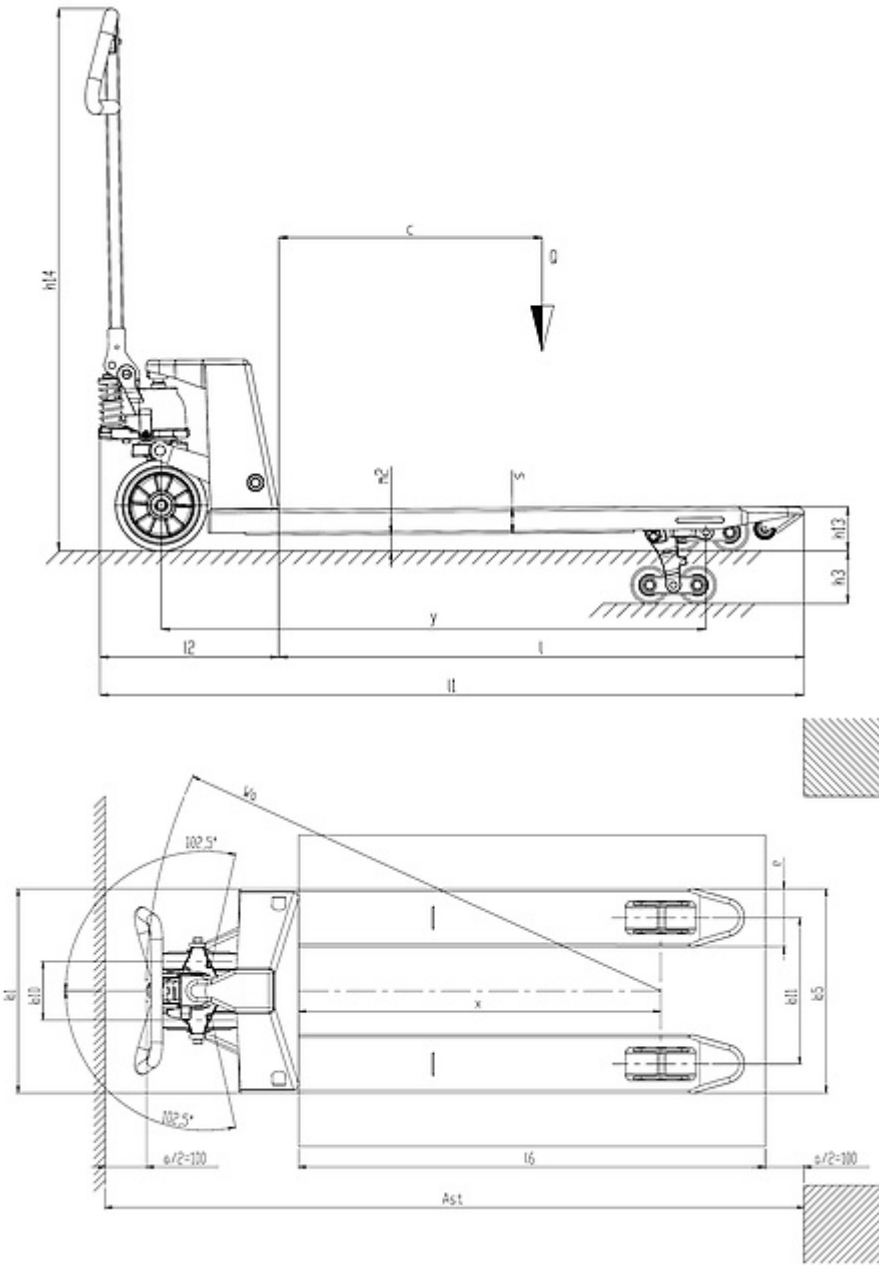

The information is aligned with the Data file at the time of download. Printed on 23/02/2021 (ID 12837)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

