

GS 25S4 800X525

The standard competitive HPT (2.500 kg)




GS 25

The GS hand pallet truck represents an easy to use, economic and robust tool for transporting pallet loads.

Reliable and easy to maintain, this model has been designed to be an excellent solution for intense use.

GS is the right machine for the customer that is looking for a simple and sturdy pallet truck: the right companion for every day work that can adapt in every situation.

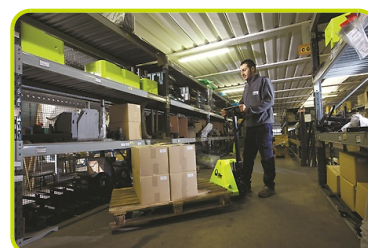

HYDRAULIC UNIT

The GS pump has been designed with extreme care of details in order to have superior characteristics and features, such as:

- **Monolithic design:** the resistant and reliable one-piece cast iron housing protects all components avoiding any accidental damages. Pump housing is processed with CNC machines to achieve high precision tolerances and high accuracy.
- **Chromed piston rod and oil seal:** in order to avoid rust and prevent oil leakage during the use.
- **Maximum pressure valve:** safety device that protects the transpallet against overloads.
- ON/OFF lowering valve



STANDARD CONFIGURATION

- Nylon - Poly 45 steering wheels
- Nylon rollers
- Four curves handle with all the controls in a single lever and with large grasping areas on the side. This allows to have much comfort during the operations avoiding excessive fatigue and comfort during pushing loads.



VARNISHING

Following an appropriate conditioning operation the frame is varnished with polyester powder at a temperature of 250° to guarantee maximum resistance to wear and atmospheric agents.



EASY TO MOUNT

Tiller easy to assemble with a fast mounting system. Robust tiller connection with two full welded joints that assure superior sturdiness in the toughest application.



OPTIONAL CONFIGURATION

- Aluminium - Rubber steering wheels
- Polyurethane rollers



- Manual control brake. The brake of the pallet truck, available with rubber steering wheels, is adjustable through the tiller lever to ensure safe use on slopes and ramps. The locking function makes it possible to park the pallet truck even on slopes without rolling away.



Descrição

1.1 Fabricante			LIFTER
1.3 Acionamento			Manual
1.4 Tipo de Operador			Pedestre
1.5 Capacidade de carga	Q	Kg	2500
1.6 Centro de distância de carga	c	mm	400
1.8 Carga do eixo ao final dos garfos	x	mm	582
1.9 Base de roda	y	mm	842

Peso

2.1 Peso de Serviço		Kg	57
2.2 Carga do Eixo - Frente Próxima		Kg	1978
2.2 Carga do eixo - frente carregada		Kg	579
2.3 Carga do eixo - frente vazia		Kg	18
2.3 Carga do eixo - frente vazia		Kg	39

Estrutura/Rodas

3.1 Koła sterujące			NYLON/POLY
3.1 Rodas: Rolos de carga			NYLON
3.2 Tamanho do Pneu: Volantes - Diâmetro		mm	200
3.2 Tamanho do pneu: Volantes - Largura		mm	45
3.3 Tamanho do pneu: Rolos de carga - Diâmetro		mm	82
3.3 Tamanho do Pneu: Rolos de Carga - Largura		mm	60
3.5 Dimensão dos pneus: rodas traseiras - Qtd. (X=livre)		nr	4
3.6 Piso da Frente	b10	mm	155
3.7 Traseira do Piso	b11	mm	375

Dimensões

4.4 Altura da Elevação	h3	mm	115
4.9 Altura Máxima em Posição de Movimento	h14	mm	1185
4.15 Altura, Baixo	h13	mm	85
4.19 Comprimento Total	l1	mm	1200
4.20 Comprimento dos Garfos	l2	mm	400
4.21 Largura Total	b1	mm	525
4.22 Garfos - Espessuras	s	mm	55
4.22 Garfos - Largura	e	mm	150
4.22 Garfos - Comprimentos	l	mm	800
4.25 Distância Entre Garfos	b5	mm	525
4.32 Ao Solo, Centro de Distância Entre os Eixos	m2	mm	30
4.34 Largura do Corredor	Ast	mm	1673
4.35 Raio do Ângulo	Wa	mm	1017

Desempenho

5.2 Velocidade de Elevação Carregado	strokes	12
5.2 Velocidade de Elevação Descarregado	strokes	12

